


Updating Software

Updating with Techlink™ App

1. Download Headsight Techlink App on your iPad or iPhone from the Apple store.
 - Must have Horizon 2.4.0 or later software
 - Must have Boot Loader 1.3.5 or later
 - Login in following on screen instructions
 - Then go to Help Info to learn how to use app

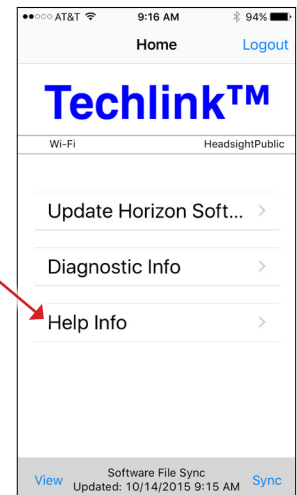

Updating with USB

1. Download latest version from website.
2. Unzip files, copy file insght2.bin onto root directory on USB flash drive.
3. Unplug Bridge unit in the cab while the Base update is being applied.
4. Plug USB flash drive into USB port on Horizon base on header.
 - If unit is not yet powered up, cycle key on combine
 - Base unit should start blinking yellow shortly after applying power. If this doesn't happen, unplug and plug the single point connector on the feederhouse
5. Wait until Horizon base has a green indicator light (should be no longer than 5 min)
6. You can now safely remove the USB flash drive.
 - Be sure to replace USB cover cap to reseal box
7. Place USB stick in the Bridge unit.
8. Plug connector back into the Bridge unit.
9. Wait until Horizon bridge has a green indicator light (should be no longer than 5 min)
10. Unplug USB when a green light is displayed on the Bridge unit
 - Be sure to replace USB cover cap to reseal box
11. Wait for Horizon Bridge pool to appear on VT
 - A power cycle might be needed after update
12. Your units are now updated. Please verify that your Horizon initial settings are correct.
 - If a drop down menu is displayed, try to select the serial number of the base unit (the base applications should start loading after the bridge indicates a "linked" status).



If your Horizon units fail to update you must do a complete format on USB drive to a (FAT) file type and then recopy insght2.bin to root directory. If Horizon box continues to blink orange for more then 6 minutes or has a red light during update use Boot Loader Update file before the main update file.